

3125kVA Rental Transformers



Manufactured
by VanTran®

Wide Voltage Range

Multiple medium voltage
settings available

Rugged Construction

Designed specifically for rental with cage,
fork pockets and lifting eyes

Selectable Voltage Range

External dual voltage switch, delta wye switch
and tapchanger; multiple units
available for paralleling

Transformer Specifications

Switch Positions

One delta-wye, one dual voltage
and tapchanger positions

Primary Voltage

480/277

Controls

Via main bus, or 70 amp, 480 volt,
3 phase external source and
automatic pressure relief valve with
pressure vacuum gauge

Oil Fill

Non-P.C.B. mineral oil with liquid level site
glass, temperature gauge with alarm

Secondary Voltage

42400, 7970, 7620, 7200, 6928 Delta
4160 GRDY/2400, 12000GRDY/6928,
12470GRDY/7200, 13200GRDY/7620,
13800GRDY/7970, 14400GRDY/8320

Dimensions

Height: 8.8", Width: 120",
Length: 7.9", Weight: 18,000 lbs.
with protective cage

it works. every time.


877.838.1088

hpsloadbanks.com
sales and rentals



VanTran 3125kVA Rental Transformers

Transformer Footprint Rendering

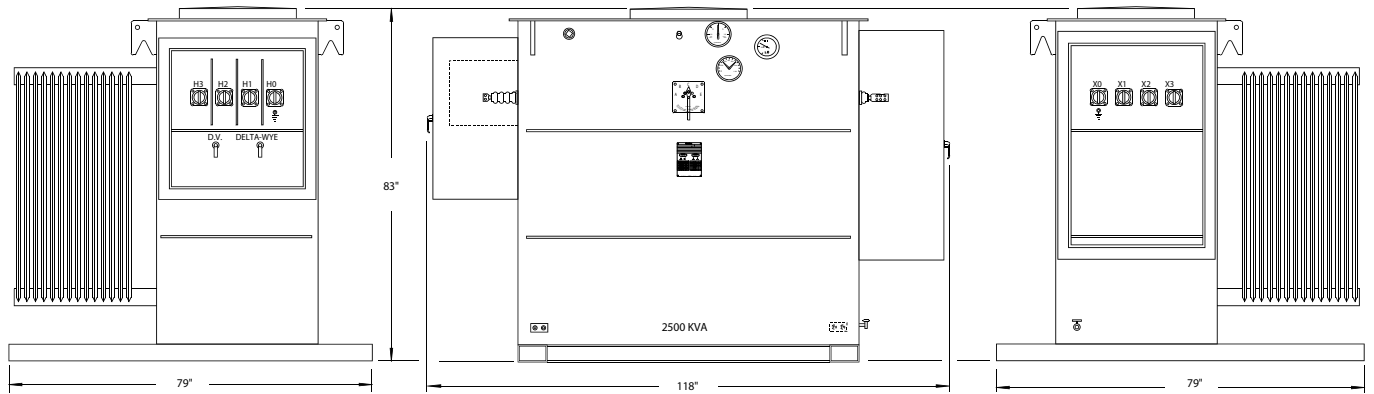

Rendering doesn't include protective cage.

Materials and specifications are subject to change without notice.

it works. every time.

877.838.1088

hpsloadbanks.com
sales and rentals